











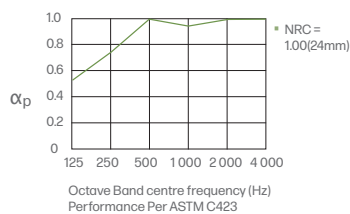




















THERMATEX® Alpha One

Features

- THERMATEX Alpha One offers a modern, white appearance and is the optimal solution for spaces that need excellent sound absorption
- Outstanding sound absorption (NRC 1.00)
- Excellent light reflectance (88%)
- ISO 4 Clean Room performance
- Ideal for offices, classrooms and learning applications



THERMATEX® Alpha One

	Panel Options	Board	Tegular 24/90																		
 Edge details																					
 Dimensions (mm)	600 x 600 x 24mm	207197	207200																		
	1200 x 600 x 24mm	228134	220966																		
 Suspension systems	Shall be AMF: Prelude 24mm steel T-Bar																				
 Weight	4.0kg/m ²																				
 Colour	White																				
 Sound absorption	<table border="1"> <thead> <tr> <th>Thickness</th> <th>NRC</th> <th>125</th> <th>250</th> <th>500</th> <th>1000</th> <th>2000</th> <th>4000</th> <th>Hz</th> </tr> </thead> <tbody> <tr> <td>24mm</td> <td>1.00</td> <td>0.55</td> <td>0.85</td> <td>1.00</td> <td>0.95</td> <td>1.00</td> <td>1.00</td> <td>α_p</td> </tr> </tbody> </table> <p>NRC = 1.00 as per ASTM C 423 & EN ISO 354</p>		Thickness	NRC	125	250	500	1000	2000	4000	Hz	24mm	1.00	0.55	0.85	1.00	0.95	1.00	1.00	α_p	 <p>Octave Band centre frequency (Hz) Performance Per ASTM C423</p>
Thickness	NRC	125	250	500	1000	2000	4000	Hz													
24mm	1.00	0.55	0.85	1.00	0.95	1.00	1.00	α_p													
 Sound attenuation	EN ISO 10848-2 CAC 30 dB as per EN ISO 717-1																				
 Fire resistance	Conforms with NCC Spec. C1.10 as tested to AS 5637.1:2015 - Group 1, and ISO 5660 - Group 1 - S																				
 Light reflectance	88%																				
 Thermal resistance	R-Value = 0.60 m ² K/W as per EN 12667																				
 Humidity resistance	RH95																				
 Clean room	ISO 4 as per ISO 14644-1																				
 Indoor air quality	 A+  E1  IACG	Cleanability / Durability  Wipeable  Scratch resistance																			
 Sustainability	 43%      																				

Specifications

- Ceiling system shall comprise AMF Thermatex Alpha One.
- Panels shall achieve NRC 1.00, CAC 30, and Clean Room ISO 4.
- Panels certified for Green Star and WELL Building.

- Nominal size 600x600x24mm / 1200x600x24mm with board / Tegular 24/90 edge.
- Suspension system shall be AMF Prelude XL 24mm Exposed Tee System.

Contact

p. +61 2 8198 9900
e. info@amfceilings.com.au
w. amfceilings.com.au

©2023 Australian Mineral Fibre (AMF) Pty Ltd
Produced 06 March 2023

